

# Product Specification



**Product:** Remote Controller

**Model No:** G270

**Date:** 2013-07-10

**Version:** V1.0


## 1. General Description

This product is a remote controller with the multi-function of Air Mouse, keyboard, Multimedia Android Control and Motion Sense Support.

## 2. Features

- a). Elegant ID design ;
- b). adopting low power consumption 2.4G wireless connection, with strong anti-disturbance ability, also with LED indicators to indicate the connection status;
- c). working under low voltage: 3.3-4.5V;
- d). With Anti-shake algorithm to make sure the mouse cursor stable and smooth;

## 3. Function

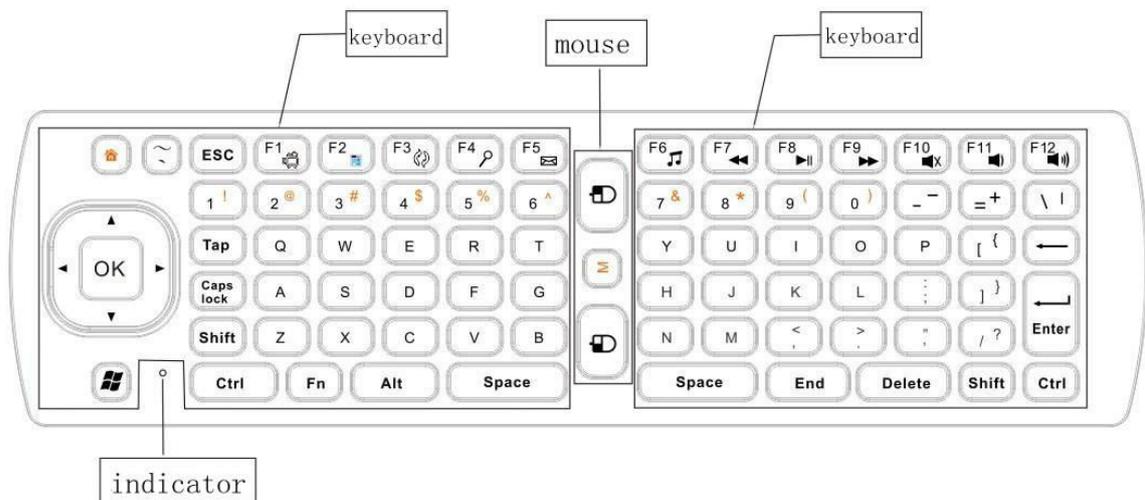

#### 4. Specification

Acceleration Sensor	3 axes gyroscope
Gyro-sensor	3 axes g-sensor
Communication	2.4 Ghz
Working Distance	10-20m
Frequency	2.400-2.483Ghz
Working Current	12mA
Battery	3 AAA Batteries
Indicator	2 LED indicators
Product Size	185*52*17mm (L*B*H)
Receiver Size	18.58*14.59*6.7mm (L*B*H) mini receiver
Weight	160g
USB	USB2.0
System	Compatible for Windows, Mac OS, Linux, Android

#### 5. Pairing

Warning: This operation may disconnect the original paired connection, please operate with cautions.

- 1). Press the "ECS" and "Enter" for 3 seconds, then the red indicator stops blinking and the green indicator begins blinking quickly.
- 2). Plug in the USB dongle receiver, keep the distance between the remote control and the pc within 1m.
- 3). When the green indicator stops blinking and the red indicator begins blinking quickly, pairing succeeds.

#### 6. Hibernation

The remote controller will turn into hibernation mode when it stays still for 20 seconds. Press any

key to wake up the remote controller.

## **7. Factory Reset**

This remote control has the function of automatic sensor alignment. Only operate this step when the mouse cursor behaves abnormally.

- 1). Press the “ECS” and “F12” for 3 seconds, the indicator begins blinking quickly.
- 2). Leave your hands from the keys and keep the remote control absolutely still.
- 3). When the indicator keeps turning on, pairing succeeds.

Notice: Keep the remote control still. If the remote controller moves, the data may be incorrect, and it needs to be readjusted.

## **8. Notice**

1. Battery: Keep the battery with enough power. When the voltage is low, the stability of mouse cursor will be affected.
2. Working Distance: The actual working distance of this remote controller will be affected by electromagnetic field. Please make sure the receiver has not been covered by metal items.
3. Pairing: The pairing has been finished before the remote control leaves the factory. This function can only be used by distributors.
4. Mouse Sensitivity Adjustment: Please change new battery first. If the mouse cursor is still unstable, then you can use this function.
5. Indicator: There are two indicators at the top of the remote controller, that is, the green indicator and the red indicator.  
  
Green Indicator: Double click or keep pressing the mouse key, it will turn on; Press other key, it will turn on and the green indicator will turn off when your hands leave the keys.  
  
Red Indicator: When the indicator blinks, it means that the remote controller is not connected well. Please check whether the receiver is correctly connected to the pc and whether the receiver is covered by some other items.

# Air Mouse G270

Πάρτε τον έλεγχο στα χέρια σας

Μίνι Qwerty πληκτρολόγιο και air mouse σε μια έξυπνη και ασύρματη συσκευή.

Χρήση για Υπολογιστή, Smart TV, android mini PC, παιχνιδιομηχανες...

Περιηγηθείτε στο ιντερνετ, δείτε τα email σας. Με ομορφο design, ενδεικτική λυχνία Led, και χαμηλή κατανάλωση χάρη στην ασύρματη τεχνολογία 2,4G.

Μονο 3 μπαταριες AAA χρειάζεται και είναι έτοιμο για χρήση (Δεν συμπεριλαμβάνοντε)

## Τεχνικά Χαρακτηριστικά

Acceleration Sensor	3 axes gyroscope
Gyro-sensor	3 axes g-sensor
Communication	2.4 Ghz
Working Distance	10-20m
Frequency	2.400-2.483Ghz
Working Current	12mA
Battery	3 AAA Batteries
Indicator	2 LED indicators
Product Size	185*52*17mm (L*B*H)
Receiver Size	18.58*14.59*6.7mm (L*B*H) mini receiver
Weight	160g
USB	USB2.0
System	Compatible for Windows, Mac OS, Linux, Android

